



INSTALLATION MANUAL

L.315.06.C.M

MERCEDES BENZ SPRINTER (2006-2018)

200/300, WDB 906

VOLKSWAGEN CRAFTER (2006-2017)

28-35, SINGLE TIRES





Contents

1	<i>Foreword</i>	4
2	<i>Introduction</i>	5
3	<i>Very important notes</i>	6
4	<i>Overview</i>	7
5	<i>Instructions for installation</i>	8
5.1	<i>Recommended Tightening Torque</i>	8
5.2	<i>Preparation</i>	8
5.3	<i>Bump Stop Removal and fitting of Upper Bracket</i>	9
5.4	<i>Attachment of the LED-Lights Sensor</i>	9
5.5	<i>Attachment of the Lower Bracket and the Bellows</i>	9
5.6	<i>Fitting of Inflator Console</i>	10
5.7	<i>Tube Connection and Disconnection, Cutting and Routing</i>	12
5.8	<i>Bellow Inflation</i>	13
5.9	<i>Bellow Alignment</i>	14
5.10	<i>Maintenance</i>	14
5.11	<i>Check List</i>	15
6	<i>Installation pictures</i>	16
7	<i>Epilogue</i>	20



1 Foreword

This manual provides instructions for the installation of an auxiliary air suspension kit, developed specifically for the **Mercedes Sprinter 200/ 300 WDB 906 (2006-2018)** and **Volkswagen Crafter 28/35 (2006 - 2017)**.

To ensure correct installation of the kit, it is strongly recommended that these instructions are read thoroughly before commencing any installation work. Installation should only be carried out by a suitably qualified mechanic or specialist installation facility. DSC Nederland will not accept any responsibility for faults or defects arising from incorrect installation, which automatically renders the guarantee invalid.

IMPORTANT: Manufacturer's Declaration Form

A manufacturer's declaration form is provided with your kit. Following installation of the kit please ensure that this form is completed, signed by a qualified fitter and a copy is returned to DSC Nederland by post, fax or e-mail. Our e-mail address is: info@dscsystems.nl



2 Introduction

THANK YOU FOR CHOOSING AN AUXILIARY AIR SUSPENSION KIT FROM THE RANGE OFFERED BY DSC NEDERLAND. AUXILIARY AIR SUSPENSION IS FITTED IN TANDEM WITH THE STANDARD STEEL SPRINGS OF THE VEHICLE SUSPENSION, AND PROVIDES ENHANCEMENTS IN TERMS OF BOTH THE STABILITY OF THE VEHICLE AND THE COMFORT OF THE PASSENGER.

VEHICLE LEVELLING

Simply by varying the air pressure in the springs, the vehicle can be levelled both front-to-rear and side-to-side. Keeping the vehicle level optimises stability, ensures correct headlamp beam distribution and reduces tyre wear arising from uneven distribution of weight.

STRAIGHT LINE STABILITY

Straight line stability is greatly increased at higher speeds, and when subjected to buffeting from cross-winds or large overtaking vehicles.

REDUCED BODY ROLL

Body roll when cornering or negotiating roundabouts is significantly reduced.

FATIGUE REDUCTION AND WEAR COMPENSATION

Suspension fatigue is reduced, so helping to prevent leaf springs from sagging under repeated or constant loading. Any sagging already present can be compensated-for. This is a particular benefit for motorhomes, which are always fully laden.

RIDE COMFORT

Air springs help to absorb shock loads from uneven road surfaces, therefore general ride quality is much improved.



3 Very *important notes*

IMPORTANT: Gross Vehicle Weight (GVW)

Air assist kits are not in themselves designed to increase the **gross vehicle weight (GVW) rating of a vehicle**. They do not legally allow for carriage of a load greater than the carrying capacity stated on the data plate of the vehicle.

Do not exceed the maximum load specified by the vehicle manufacturer.

- to avoid compromising passenger safety
- to prevent possible damage to the vehicle
- for legal reasons

VEHICLE UPGRADING

Despite the above words of caution, it is possible to upgrade the weight rating of your vehicle. This must be carried-out by a specialist supplier that will:

- carry out any necessary modifications in addition to fitting the air assist kit
- complete documentation as necessary to inform the Vehicle and Operator Services Agency (VOSA) – a mandatory requirement
- supply and fit a new weight plate to replace the original plate supplied with the vehicle

This process applies to United Kingdom registered vehicles. The process in other countries may be different.

SAFETY GUIDANCE NOTE

The following very useful guidance note is available for free download from the Health and Safety Executive (HSE):

PM85, July 2007 Safe recovery (and repair) of buses and coaches fitted with air suspension.

The uniform resource locator (URL) for this document is:


<http://www.hse.gov.uk/PUBNS/pm85.pdf>





4 Overview

THE COMPLETE BELLOW AND BRACKET ASSEMBLY
ARE SHOWN OF THE LEFT SIDE BY THE DIAGRAM BELOW.

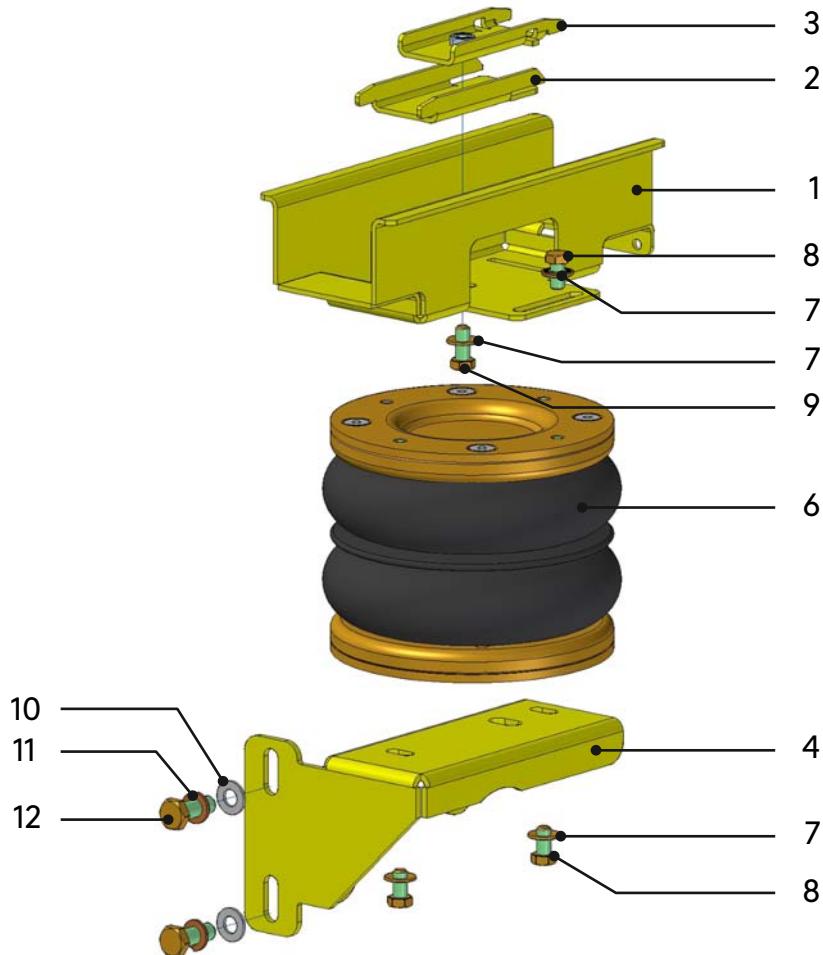

NUMBER	PART NUMBER	DESCRIPTION	QUANTITY
1	49.09.00.1.01.01	Top plate L + R	2
2	49.05.00.1.01.02	Clamp strap outside	2
3	49.05.00.1.01.03	Clamp strap inside	2
4	49.09.00.1.04	Lower bracket Left	1
5	49.09.00.1.05	Lower bracket Right	1
6	OP.LB.170-2.CPL	Air bellow 170/2	2
7	M8	Disc spring washer	10
8	DIN 933-M8x16	Hexagon bolt M8 x 16	8
9	DIN 933-M8x20	Hexagon bolt M8 x 20	2
10	DIN 125A-M10	Washer M10	4
11	DIN 127B-M10	Spring washer M10	4
12	DIN 933-M10x30	Hexagon bolt M10 x 30	4

NOT IN THE ASSEMBLY DRAWING

- Tie wraps
- Blue air hose
- An inflate option
- Declaration of conformity
- Installation manual



5 Instructions for installation



IMPORTANT: Preparation and Precaution

Before beginning installation, ensure that you have sufficient clearance between the axle and the chassis. Use a jack if necessary. Install at one side of the vehicle at a time.

Pay attention to your safety at all times during installation - always use axle stands to support the vehicle!

The position of the axle stands should be under the chassis NOT under the axle!

5.1 RECOMMENDED TIGHTENING TORQUE

During fitting of the air suspension system, it is recommended that nuts and bolts are tightened in accordance with the following table...

TIGHTENING TORQUE IN Nm			
SIZE	CLASS 8.8	CLASS 10.9	ALUMINIUM
M6 x 1.0	11.3	16.5	5
M8 x 1.25	27.3	40.1	10
M10 x 1.5	54	79	20
M12 x 1.75	93	137	43
M16 x 2.0	230	338	103

IMPORTANT:

- When both the bolt and nut are made from steel use either class 8.8 or 10.9
- For all other dimensions and tightening torques is left to the skills of a well-trained person

THE FOLLOWING INSTRUCTIONS MAKE REFERENCE TO THE DIAGRAMS ON PAGES 17 TO 19 INCLUSIVE.

5.2 PREPARATION

1. Secure the front wheels, use wheel chocks on both sides of both front wheels.
2. Take the ground terminal from the battery when work to electricity is involved.
3. Lift the rear of the vehicle till there is working space of approximately 15 cm between bump stop and rear axle.



5.3 BUMP STOP REMOVAL AND FITTING OF UPPER BRACKET

1. Remove the two bump stops - Figures 1 to 3.
2. See Figures 4 to 6. The chassis bracket assembly has two parts. Put the two parts together and offer them up to the frame left vacant by removal of the bump stop. Now slide the upper of the two chassis brackets inside the lower of the two until the assembly is loosely attached to the bump stop frame with the holes in alignment.
3. Offer the upper bracket up to the chassis bracket assembly and attach it using a single M8 x 16mm bolt and a single serrated washer - Figures 7 and 8.

5.4 ATTACHMENT OF LOWER BRACKET AND BELLOW TO AXLE

1. Remove the two bolts from the bracket that attaches the torsion beam assembly to the axle - Figures 9 and 10.
2. See Section 5.7 - "Tube Connection and Disconnection, Cutting and Routing" : Connect a tube to the bellow by pushing the tube into the air inlet port on the underside of the spring and then hand -rotating the tube by one screw turn. Use black tubing for the left-hand bellow and blue for the right-hand bellow—Figure 11.
3. Feed the tube through the hole provided in the lower bracket, then attach the bracket to the lower plate of the bellow using two M8 x 16mm bolts and two serrated washers - Figures 11 and 12. Do not fully tighten at this stage because the bellow may require alignment once inflated (see Section 5.9 and Figure 17).
4. Manually compress each bellow and then bung the end of the tube to maintain the compressed state
5. Reattach the bracket that secures the torsion beam to the axle, thereby also securing the lower bracket and bellow to the axle - Figures 13and 14.


5.5 ATTACHMENT OF UPPER BRACKET TO BELLOW

1. Release the bung from the tube. This allows air into the bellow, which consequently expands upwards towards the upper bracket - Figures 15 and 16.
2. The distance between the top face of upper plate of the bellow and the bottom face of the lower plate should now be approximately 13.5cm. Manoeuvre the bellow such that it is in good vertical alignment between the upper and lower brackets.
3. Attach the upper bracket to the bellow using two M8 x 16mm bolts and two serrated washers - Figure 16. Do not fully tighten at this stage because the bellow may require alignment once inflated (see Section 5.9 and Figure 17).



5.6 FITTING OF INFLATOR CONSOLE

Your kit is supplied with one of these inflator options:

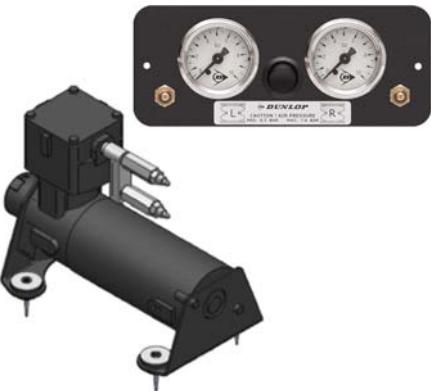	OPTION VALVES	Two valves and a small bracket
	OPTION MANO (WITHOUT CONSOLE)	Two valves and two independent 10-bar pressure gauges
	OPTION 1	Two valves in a console with two independent 10-bar pressure gauges
	OPTION 2	Two valves in a console with two independent 10-bar pressure gauges and a rocker on/off switch to operate the electric motor driven air compressor
	OPTION 3	Four valves (two for raising the vehicle ('UP') and two for lowering the vehicle ('DOWN')) in a console with two independent 10-bar pressure gauges. A pressure switch operates the electric motor driven air compressor to keep the air reservoir of 1.9 litre or 0.5 gallon at pressure
	EXTRA	A special dashboard panel DIN 1 is available for OPTION 1 , OPTION 2 and OPTION 3



Mount the console in a position of your choice whereby it is firmly fixed, has some protection from the environment (particularly important for the console with gauges) and is easily accessible. Suggested possible locations include.

'STANDARD' CONSOL

- on the rear bumper
- at the rear beside the licence plate
- on the chassis next to a rear wheel
- In a service shuttle (motorhomes)
- Beside the fuel cap

'OPTION 1', 'OPTION 2' OR 'OPTION 3'

Console...

- in the vehicle cabin, within reach and sight of the driver
- beside, under the driver seat
- in the wall of a cupboard (motorhomes)
- in a service shutter (motorhomes)

'COMFORT' PACKAGES

The '**OPTION 2**' and '**OPTION 3**' panels, as shown above, are each part of a Comfort Package that is supplied with a compressor (and also an air reservoir in the case of the '**OPTION 3**' panel) for ease of spring inflation and ride height setting. For further information please ask your dealer. The photograph below shows all of the parts of Comfort Package '**OPTION 2**' and '**OPTION 3**'.



OPTION.2



OPTION.3

VERY IMPORTANT:


Only operate the air suspension when the vehicle is
NOT DRIVING!



5.7 TUBE CONNECTION AND DISCONNECTION, CUTTING AND ROUTING

CONNECTION AND DISCONNECTION

Tubes are connected as shown by the diagrams below:



A. Slide a nut over the end of the tube



B. Push the tube onto the connector as far as possible



C. Feed the nut up to the connector, fully tighten by hand and finally tighten one additional turn using spanners

CUTTING

To achieve good sealing and air-tight fitting of tube ends to their connecting parts, it is very important to cut tubing cleanly and squarely. A dedicated guillotine action tubing cutter is recommended, or a craft knife if such a tool is not available. Do not use electrician's side cutters.



A dedicated tubing cutter
RECOMMENDED



Electrician's Side Cutters
NOT RECOMMENDED



ROUTING

Study the underside of the vehicle and decide how to route each branch of the air circuit

- To minimise the risk of chafing, avoid running tubing over metal edges as much as possible.
- Avoid close proximity to heat sources such as the exhaust assembly.
- Choose a route that provides as much protection as possible from dirt, debris any solid objects that may impact the underside of the vehicle.
- It is recommended that tubes are guided alongside brake lines as much as possible. Use cable ties ('tie wraps') to secure tubing to the chassis, taking care not to over-tighten them.

5.8 BELOW INFLATION

Once installation of the air assist kit is complete, inflate the air bellow to achieve the desired ride height via the inflator console taking careful note of the following.

ONCE THE INSTALLATION OF THE AIR ASSIST KIT IS COMPLETE:

- inflate the air bellows to achieve the desired ride height via the inflator console.
- To achieve a correct ride height, the rear of the vehicle is approximately 6 cm higher than the front of the vehicle. That will correspondent with a bellow height between 11 cm and 14 cm.
- The correct used pressure is up to the discretion of the installer, but is mostly between the 1.5 bar and the 4.5 bar.
- The pressure for driving your vehicle is depending on the weight of the vehicle and the condition of the original springs.
- Always keep in mind that you are using air assist suspension, that means helper springs, they are designed to help. Do not let them take over the original springs.
- Because our system is independent between the left and the right side, it is not a problem to inflate one side more to achieve the same height on the left and also on the right side.
- Once you know the pressure on your left and on your right side, make good notice of it, so you can check the pressure of your system every time you start driving.
- The note here below is for extreme situations.


IMPORTANT: Maximum and Minimum Pressure

MAXIMUM PRESSURE 7.0 BAR
MINIMUM PRESSURE 0.5 BAR

Do not exceed 7.0 bar (100 psi), which is the recommended maximum charge pressure for the air springs. The springs may be deflated if the vehicle is to be stored for a lengthy period without use, but a pressure of at least 0.5 bar (7 psi) should be maintained at all times in order to avoid possible compression damage to the springs.



5.9 BELLOW ALIGNMENT

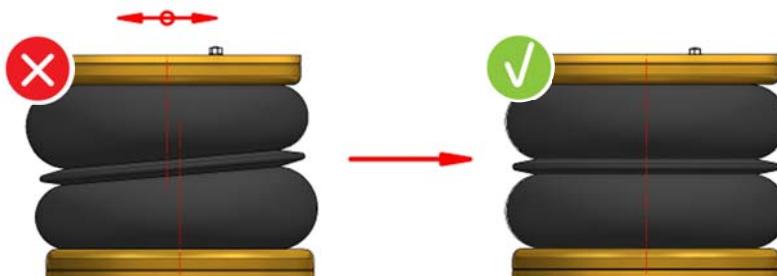

1. With the vehicle standing at the desired ride height, ensure that the springs are correctly aligned as illustrated above and then tighten the bolts to secure the bellow to both the upper and the lower mounting brackets.
2. Always check if the air bellow won't touch any obstacle.

5.10 MAINTENANCE

Following installation, it is recommended that all metal parts are coated with a protective substance such as body wax.

The system does not require very much maintenance other than...

1. To maintain air pressure in the springs. Much like a tyre, the system may lose a little air over time.
2. To keep the air bellows clean. It is suggested that, when washing the vehicle, the bellows are inspected and cleaned as necessary (preferable by spraying). Look in particular for stones or grit trapped between convolutes, as this may damage the bellow.
3. Check before and after the winter period the wax coating. Re-wax when necessary

5.11 CHECK LIST

Before driving the vehicle following completion of installation of the auxiliary air suspension system, please check:


- All bolts tightened to the recommended torque (Page 8)?
- Air springs set in alignment (Section 5.9)?
- Enough free space around the air springs to avoid wearing?
- All metal parts wax coated (Section 5.10)?
- Manufacturer's declaration form completed and a copy returned?















A wait of 24 hours is recommended in order to ensure that the vehicle has maintained its stance and that there are no air leaks present.




6 INSTALLATION PICTURES

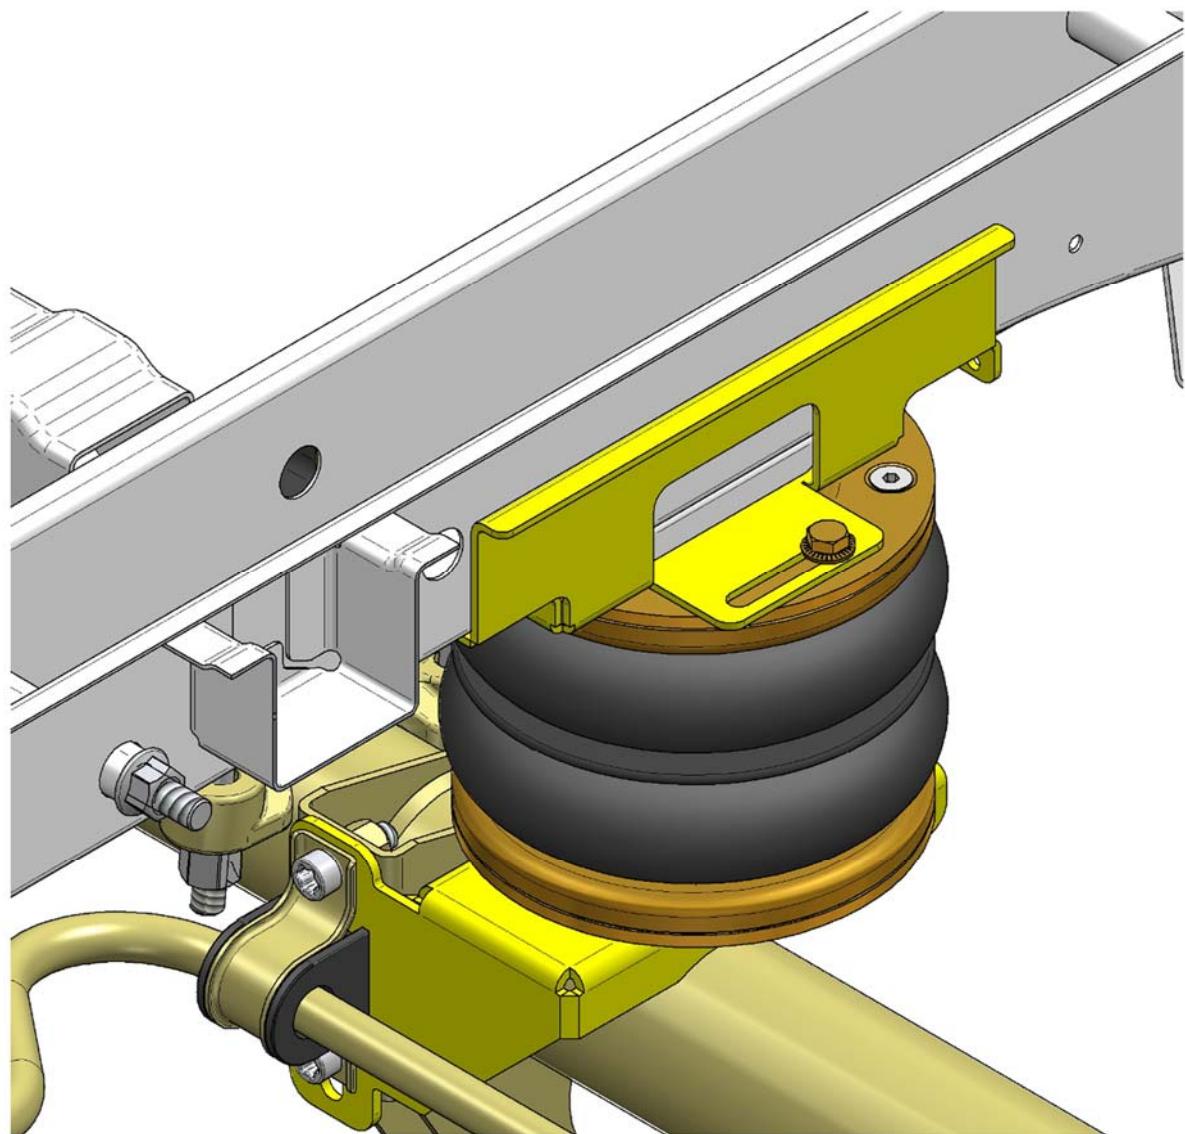

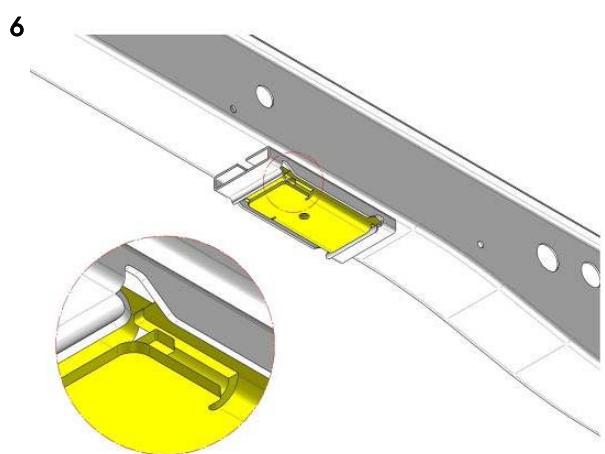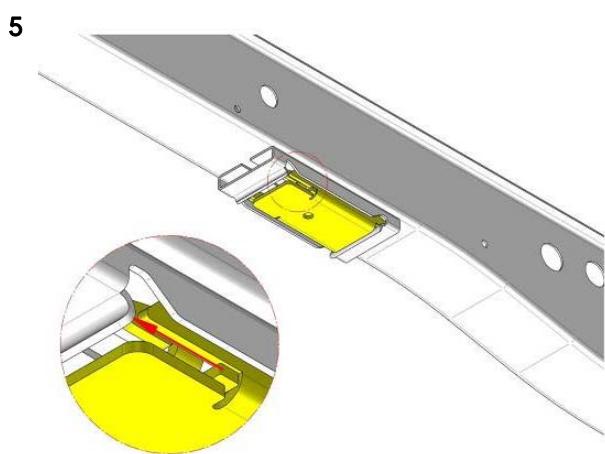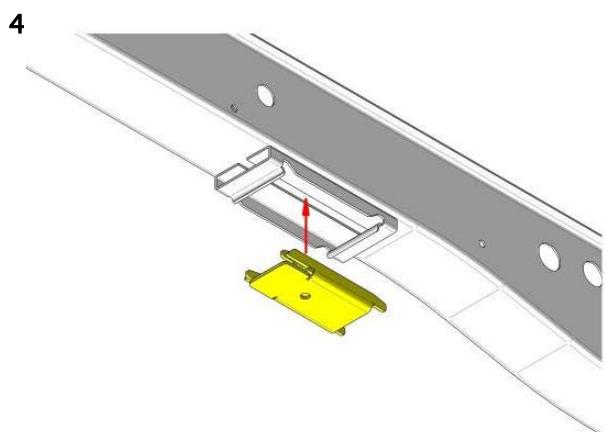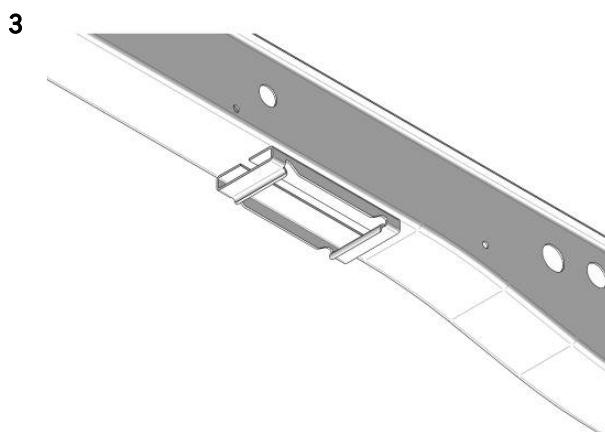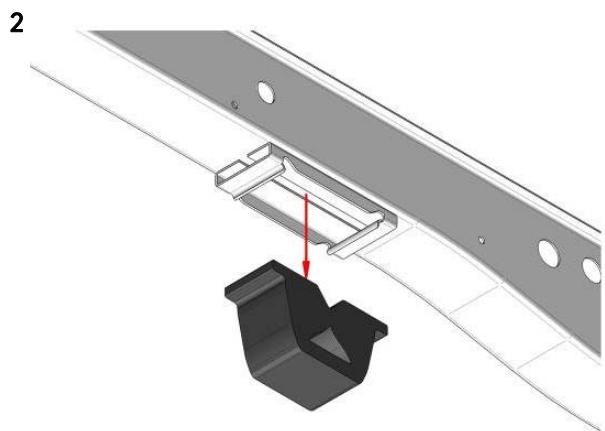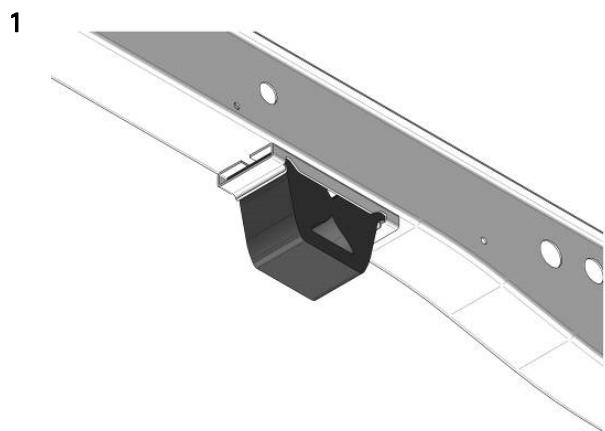


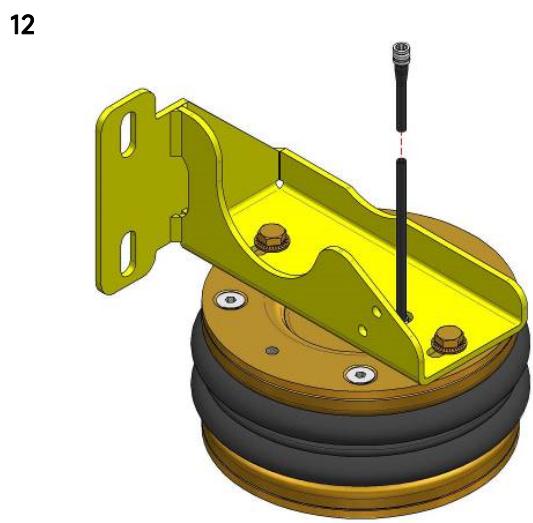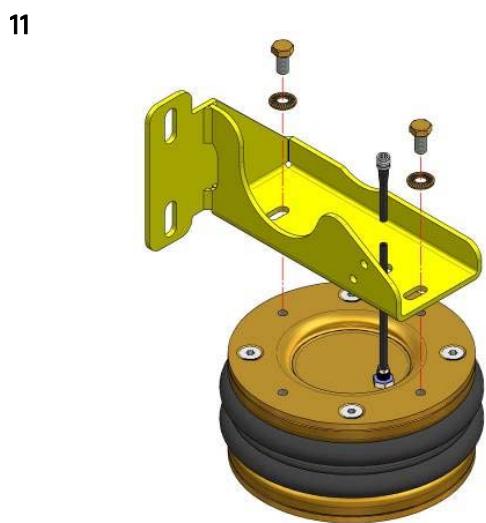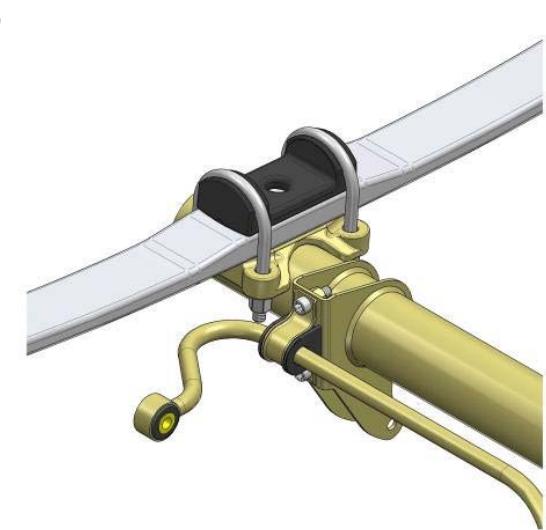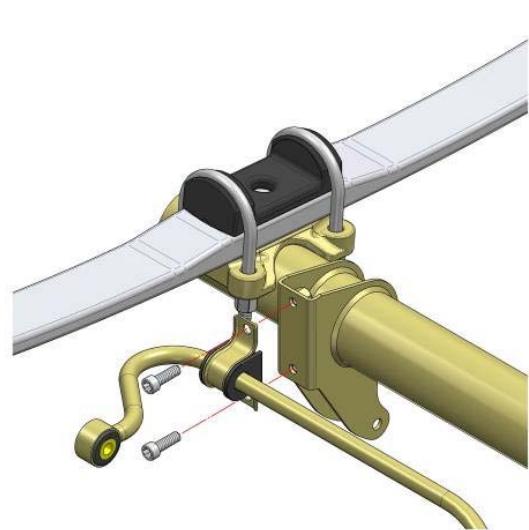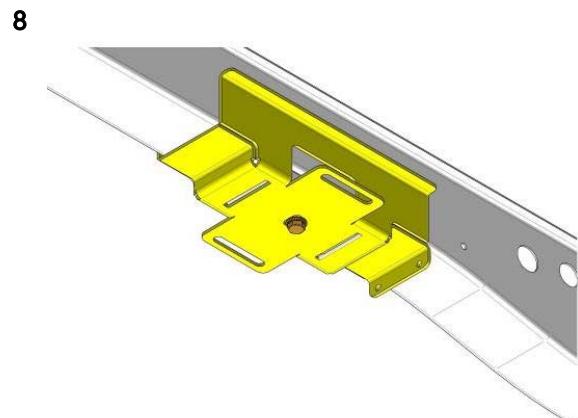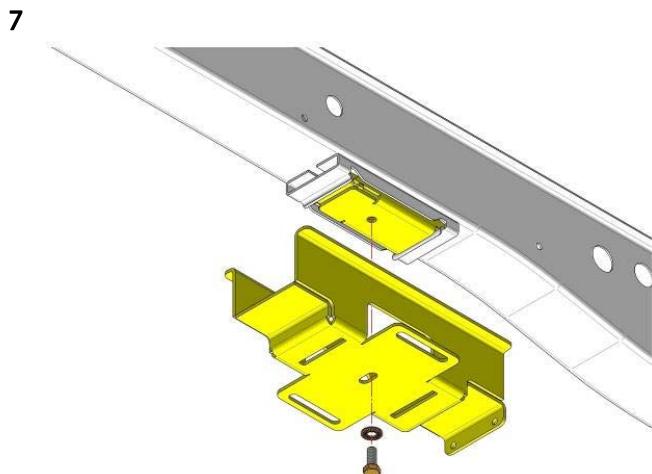


13

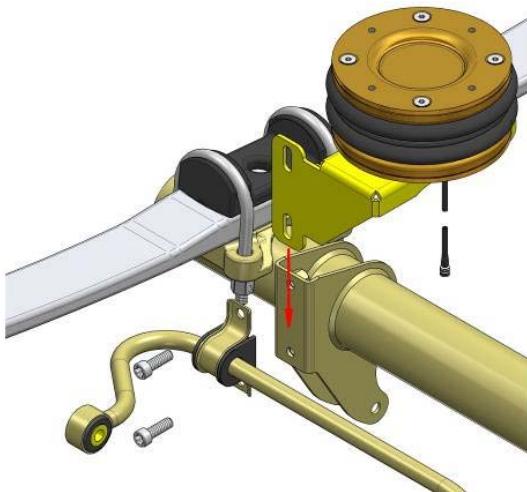


14

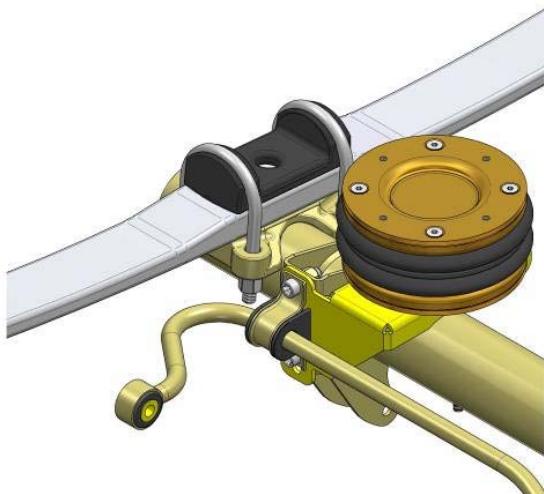


15

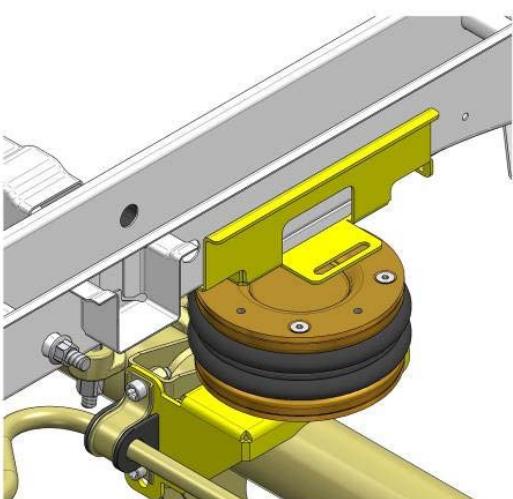


16

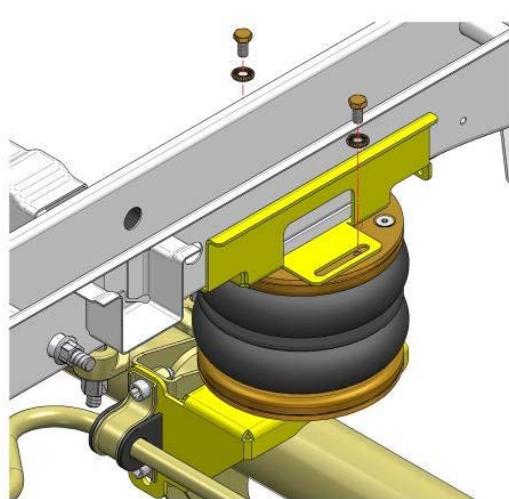

17



Spring out of alignment
mounting plate axes offset



Spring in alignment mounting
plates parallel and coaxial

CAUTION! - Before fully tightening the bolts that secure the air spring to the upper and lower brackets, set the vehicle at ride height (spring height approximately 11..14 cm) and ensure that the springs are correctly aligned.



7 EPILOGUE

DSC Nederland hopes that you enjoy the benefits that your DUNLOP air suspension system will provide for you. To ensure optimal performance, we advise that you have your system checked frequently by qualified personnel. As recommended in the fitting instructions, it is important to coat all the steel parts with a protective substance such as body wax.

IMPORTANT: Manufacturer's Declaration Form

A manufacturer's declaration form is provided with your kit. Following installation of the kit please ensure that this form is completed, signed by a qualified fitter and a copy is returned to DSC Nederland by post, fax or e-mail. Our e-mail address is: info@dscsystems.nl

As a condition of your warranty, modifications to the system may only be carried out by personnel of DSC Nederland.

ENQUIRIES

For general enquiries please contact one of our dealers. You can find them on our website.

WWW.DSCSYSTEMS.NL



DSC Nederland B.V.
Het Wegdam 22
7496 CA Hengevelde
Nederland

T +31 (0)547 333 065
E info@dscsystems.nl
W www.dscsystems.nl



DUNLOP and the Flying D device are trademarks
of Sumitomo Rubber Group and are used under
license by DSC Nederland B.V.